

## PTX2 - A3 LC


- \* On-line double conversion
- \* High efficiency
- \* Digital control
- \* Different power ratings from 1 to 10 kVA
- \* Comms slot for SNMP/Relays or optocoupler
- \* Possibility to connect in parallel N+1 units for redundant operations or to increase power availability (only possible on 6 kVA and 10 kVA models)



PTX2-A3 UPS

## PTX2 - A4 LC

- \* On-line double conversion
- \* High efficiency
- \* THD <3%
- \* Trafoless design
- \* Different power ratings from 10 to 20 kVA
- \* Possibility to connect in parallel up to 3 units for redundant operations or to increase power availability.

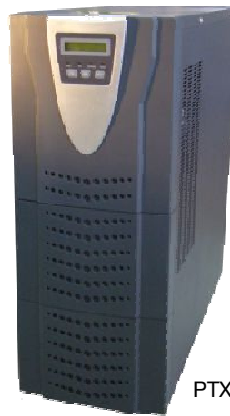

PTX2-A4 UPS

### PTX2-A3 LC DATI TECNICI / TECHNICAL DATA

Potenza Nominale / Nominal Power (kVA)	1 2 3 6 10
Potenza attiva / Active Power (kW)	0,7 1,4 2,1 4,2 7
<b>INPUT</b>	
Tensione Nominale / Nominal voltage	220/230/240 VAC
Frequenza Nominale / Nominal Frequency	50/60 Hz
<b>OUTPUT</b>	
Tensione Nominale / Nominal Voltage	220/230/240 VAC
Frequenza Nominale / Nominal Frequency	50/60 Hz

### PTX2-A4 LC DATI TECNICI / TECHNICAL DATA

Potenza Nominale / Nominal Power (kVA)	10 15 20
Potenza attiva / Active Power (kW)	7 10.5 14
<b>INPUT</b>	
Tensione Nominale / Nominal voltage	380/400/415 VAC (3Ph+N)
Frequenza Nominale / Nominal Frequency	50/60 Hz
<b>OUTPUT OUTPUT</b>	
Tensione Nominale / Nominal Voltage	220/230/240 VAC
Frequenza Nominale / Nominal Frequency	50/60 Hz

## PTX2 - A3J



PTX2 - A3J series UPS are total high frequency, pure online and intellectualized UPS. These UPS are single-phase alternating current input and output and are available in rack mounting in three power ratings: 1kVA, 2kVA and 3kVA.

